

SOLO



FITTING INSTRUCTIONS

IMPORTANT _____ PAGE 1

CABINET

INSTALLATION _____ PAGE 2 A 4

Important :

- Unpack the units carefully ensuring not to scratch them with the knife blade. Inspect every item carefully before installation as no claim for faults or damages will be accepted once the item is installed.
- We recommend that you use protection (for example a blanket) to cover the working area. Mirrors and worktops are very fragile, we recommend that you put them on battens (and never directly onto the floor).
- Our furniture is designed to be fitted on a level, flat finished wall.
- It is imperative that you use a sanitary grade silicone sealant at the back and sides of every worktop as water infiltrations will damage your unit and this is not covered under our product guarantee.
- All surfaces of all units should not be exposed to standing water or persistent humidity. They must be wiped and dried off immediately after use. If your unit is not cared for correctly it will deteriorate and this will not be covered under our product guarantee.
- All our units are guaranteed for 10 years* from date of invoice (1 year for mirrors, electrical items, cisterns, WC frames, sanitary ware, taps and accessories) against all manufacturing defects acknowledged by our company, limited to domestic users.
- The guarantee does not apply to any products that have been misused or abused in any way. The products must be installed and cared for in line with our fitting instructions, local water byelaws, IEE electrical directives and any other applicable regulations.
- In the unlikely event that the product fails within 10 years* (1 year for mirrors, electrical items, cisterns, WC frames, sanitary ware, taps and accessories), we offer a free of charge replacement part (or nearest equivalent). Liability is limited to individual products and does not cover consequential loss/damage or any further unfitting/refitting costs or financial compensation. The customer will be required to pay for the installation cost of the replacement part.

* Refer to general terms of sale

MAINTENANCE:

- Wipe and rinse the surface of the furniture after contact with any chemical product.
- Do not use abrasive cream (cif, etc...), wire wool, scouring pad, solvent, acid, etc...
- Dry the surface off with a soft cloth after cleaning
- For mirrors, use a chamois leather, and dry the edges with a suitable soft cloth.
- Use a dry cloth to clean any electric components, they must be switched off.

OUR FURNITURE WILL DETERIORATE THROUGH EXCESSIVE WATER SPILLAGE OR HEAVY CONDENSATION. IT IS ADVISED THAT EVERY BATHROOM SHOULD BE WELL VENTILATED AND FITTED WITH A SUITABLE EXTRACTOR FAN TO AVOID ANY PERSISTENT HUMIDITY AND ALL FURNITURE SHOULD BE PROTECTED WITH BATH/SHOWER SCREEN ENCLOSURES TO PRESERVE THEIR QUALITY.



ELECTRICAL INSTALLATION:

All Ambiance Bain units fitted with electrical components (mirrors, mirrored cabinets, sockets, etc...) must only be installed in ZONE 3. Installation and fitting of all electrical items must be completed by a qualified electrician. Any final decisions regarding the installation should also be made by the electrician. All electrical items must be tested prior to installation, as liability is limited to replacement items only.

All information is downloadable from the website www.ambiancebain.co.uk

SPARE PART BOX CONTENT


/ TOOLS REQUIRED

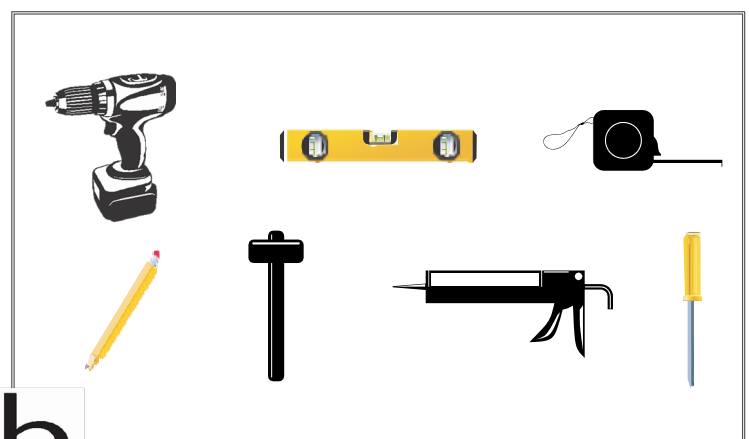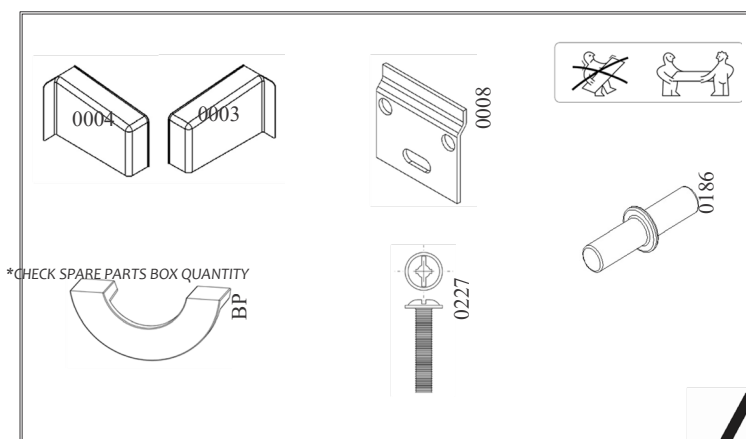


INSTALLATION BASIN UNIT



1 FIX THE WALL PLATES «0008» (screws and wall plugs not included)

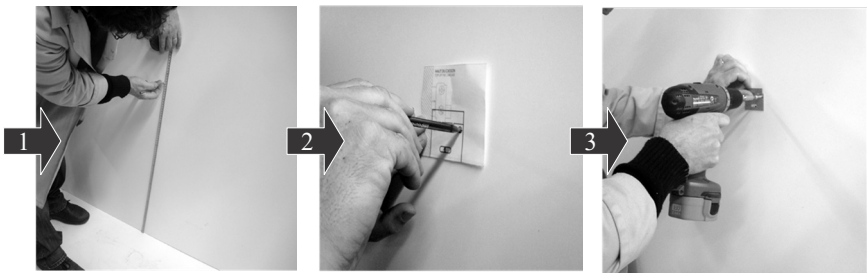

- 1 Determine the finished height
- 2 Position the template, mark out and drill
- 3 Fix the first wall plate
- 4 Place the second wall plate aligning it with the first one

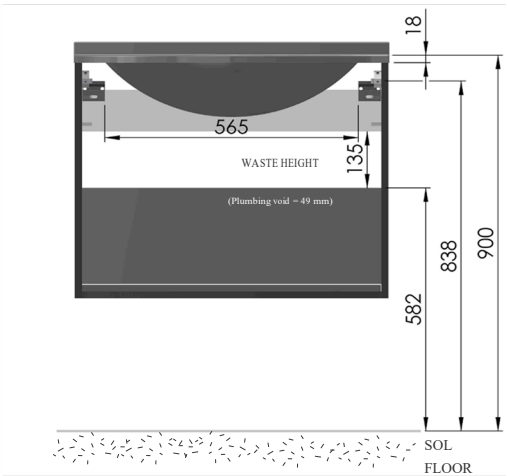

All dimensions are in mm.
The dimensions are given at the top of the wall plate.



CAUTION:
Ensure that you use the correct fixing according to the type of wall construction.
Fix all the wall plates

2 REMOVE THE DOORS, SEE SEPARATE INSTRUCTIONS ATTACHED




ADVICE :
Use wedges to put the unit on the floor.




3 REMOVE THE REMOVABLE BACK




4 REMOVE THE MELAMINE SHELF



5 LOOSEN THE WALL HANGING BRACKETS ON THE UNIT

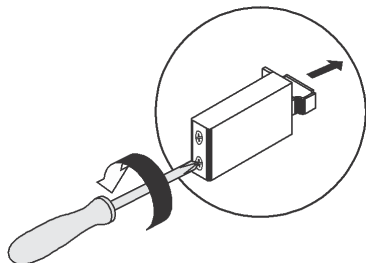


6 HANG THE UNITS ON THE WALL PLATES




7 TIGHTEN THE BRACKETS ON THE UNIT SO THAT THE FURNITURE FITS TO THE WALL AND ADJUST THE LEVELS



8 FIT THE WALL HANGING BRACKET COVERS «0003 and 0004»



9 INSTALL THE OVERFLOW PROVIDED (it is advisable to fit the tap immediately after this step)

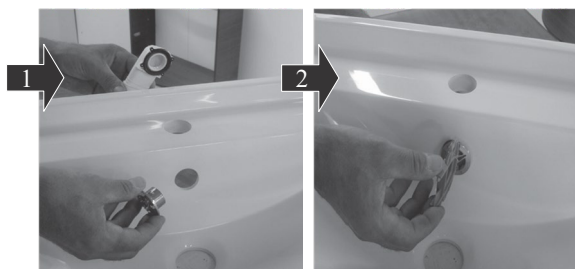

Fit the overflow

Screw overflow ring with the key provided



CAUTION:
Tighten only by hand
Do not forget the seals

10 APPLY SILICONE ON TOP OF UNIT AND ON THE WALL (thickness of the worktop)



FAILURE TO
APPLY THIS
NECESSARY WILL
INVALIDATE ANY
PRODUCT
WARRANTY

11 INSTALL THE SMO TOP ON THE UNIT




ADVICE:
Place basin onto unit first then push back to wall. Wipe off any excess silicone.

INSTALLATION MEUBLE BAS SOUS VASQUE INSTALLATION BASIN UNIT

12 CONNECTING THE PLUMBING, CHECK FOR LEAKS

- 1 Insert the waste (slotted waste) in the hole
- 2 Connect the overflow to the waste
- 3 Tighten the waste
- 4 Connect the trap to the waste pipe
- 5 Screw the trap to the waste

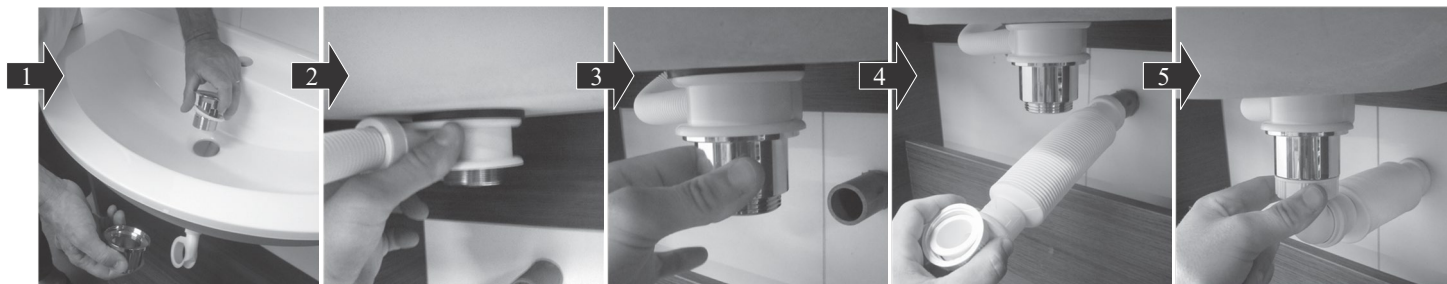


The connection and elements used are given as an example.




CAUTION :
Hang tighten only
Do not forget the seals

13 REFIT THE REMOVABLE BACK (cut if necessary)



It is necessary to position the rear in the opposite direction to that of step 3 so it will sit on the bottom of the unit.

14 FIT MELAMINE SHELF (pegs «0186») (cut if necessary)

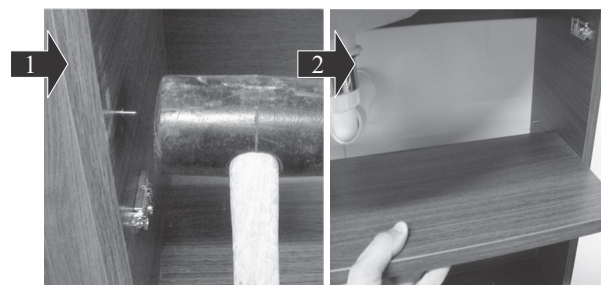

1 Fit the pegs provided.


2 Place the shelf on the pegs.

15 FIT AND ADJUST THE DRAWER OR THE DOOR, SEE SEPARATE INSTRUCTIONS ATTACHED



Make sure the unit is level so that adjusting is not too difficult

16 FIX THE HANDLES

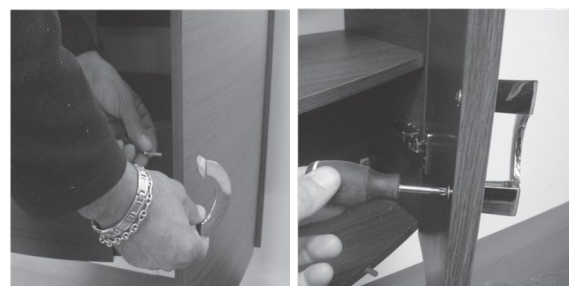

Fix the handle «BP» with the screws «0227»
The fascia is pre-drilled